

COATING PRODUCT #34100

SILICON ANTI-REFLECTION COATING

Description

This coating for Si components exhibits excellent transmittance in the 1.75 to 5 micron region.

Spectral Performance

Substrate: 0.040" Si, coated both sides
Spectral region: 1.75 to 5.0 microns

Product Specifications:

Tav ≥ 95% (through both surfaces)

Typical Performance:

Tav ≥ 96% (through both surfaces)

Quality Standards

This coating shall meet the quality requirements of MIL-C-675, MIL-STD-810, MIL-M-13508, MIL-F-48616, and MIL-C-48497 where applicable.

Environmental Performance

Coatings are produced to meet the following test criteria:

Test Available

Adhesion

Abrasion

Humidity

Salt Spray (fog)

Test Method


Cellulose tape test

20 cycle eraser test

24 hours at 120° F, 95-100% RH
or 10 days at 120° F, 95-100% RH

ASTM B117-73 for 24 hours

Coatings are tested to ensure specification compliance and certification can be provided. Customer specified lot-testing is available upon request. For additional information please contact us at 951-926-7666 or opticalsystems.sales@ii-vi.com

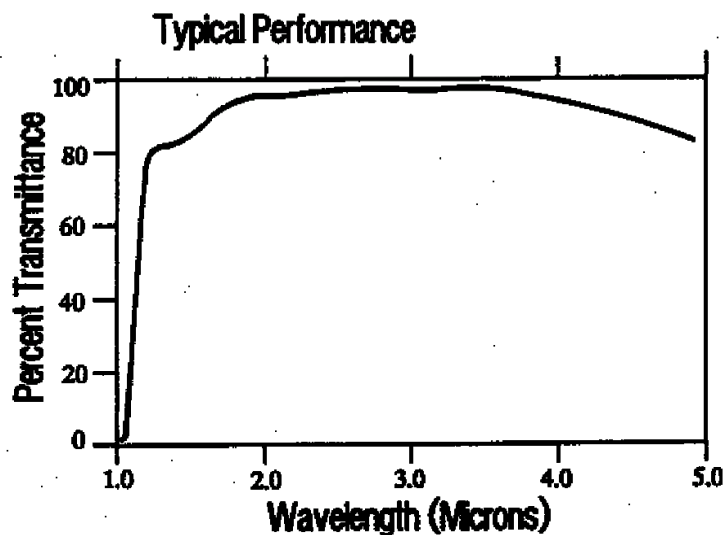

ISO 9001
AS 9100C
ISO 13485

II-VI Optical Systems • 36570 Briggs Road
Murrieta, CA 92563
www.opticalsystems.com

TEL 951-926-2994 FAX 951-926-1984